



### PRODUCTIVITY REDEFINED

- World's largest working envelope with high capacity throughout
- JLG QuickStick<sup>™</sup> capability allows for full height to ground in ~2 minutes
- Pivoting axles deploy in ~1 minute
- Full height drive capability

## **OPERATOR CONFIDENCE**

- Cylinder deployed pivoting axles create wide footprint
- LCD display keeps operator fully informed on location in work envelope
- Advanced hydraulics and cylinder dampening provides for smooth ride

## TRANSPORTABLE

• Fits most standard trailers

## Standard Features

- 0.91 x 2.44 m Platform
- · Articulating Jib
- Dual Rated Capacities (270 kg / 450 kg)
- Drive-Out Extendable Axles
- 180° Hydraulic Platform Rotator
- AC Receptacle in Platform
- · Tilt Light and Alarm
- Swing-Out Engine Tray
- 12V-DC Auxiliary Power
- Hourmeter
- · Control ADE® System
- · Hydrostatic Drive
- Proportional Controls

- · Gull-Wing Steel Hoods
- Platform Console Machine Status Light Panel<sup>2</sup>
- Lifting/Tie Down Lugs
- Engine Distress Warning/Shutdown-Selectable via JLG Analyzer
- · All Motion Alarm
- LCD Panel at Operator's Platform Contol Console
- · Quik Stik®
- · Tool Tray
- · JLG Skyguard active system

2. Provides indicator lights at platform control console for system distress, fuel level, low fuel, 5 degree tilt light and foot switch status

## **Standard Specifications**

Power Source

• Diesel Engine Deutz TCD 3.6 T4F · Fuel Tank Capacity

170 L

74.4 kW

Hydraulic System

· Hydraulic Tank Capacity

352 L

Tyres

Standard

445/50D710 24 ply Foam-Filled

# **Accessories & Options**

- Diesel Engine Deutz TCD 3.6 LRC
- 36 x 72 in. (.91 x 1.83 m) Platform
- Inward Self-Closing Swing Gate
- · Light Package3
- Soft Touch System
- Cold Weather Start Kit<sup>4</sup>
- Hostile Environment Kit<sup>5</sup>
- Flashing Amber Beacon
- Cold Package Plus<sup>6</sup>
- 4. Includes engine block heater, battery heater and oil tank heater. 5. Includes console cover, boom wipers and cylinder bellows.
- · Special Hydraulic Oils
- Skyguard beacon (ILOS)
- Accessory Packages:
- SkyAir®
- SkyWelder®
- SkyGlazier®
- SkyPower® Package 7500 Watt Generator Power Cable to Platform
- 3. Includes platform mounted worklights and drive/backup lights. 6. Includes extreme cold engine oil, fuel conditioner, engine block heater, battery blanket, glow plugs, hydraulic tank heater, oversized footswitch and arctic hydraulic oil priced separately




## **Performance**


Working Height     Working Outrooch	48.15 m 23.55 m
Working Outreach     Un and Over Unight	23.55 III 18 40 m
Up and Over Height  Couring  Couri	10110111
Swing     New Committee Beatwinter I	360° Continuous
Platform Capacity-Restricted	450 kg
<ul> <li>Platform Capacity-Unrestricted</li> <li>Platform Rotator</li> </ul>	270 kg
- Ideloliii ilotatoi	180° Hydraulic
• Jib Length	2.44 m
Jib Range of Articulation	130° (+75, -55)
Jib Horizontal Rotation	125° (55 right, 70 left)
A. Platform Size	0.91 m x 2.44 m
B¹. Overall Width (Axles Retracted)	2.50 m
B <sup>2</sup> . Overall Width (Axles Extended)	5.00 m
C. Tailswing (working condition)	0.70 m
D. Stowed Height	3.10 m
E <sup>1</sup> . Stowed Length	15.10 m
E <sup>2.</sup> Stowed Length (transport position)	12.10 m
F. Wheelbase (axles extended )	4.60 m
G. Ground Clearance	0.30 m
• Weight <sup>1</sup>	26,027 kg
<ul> <li>Max. Ground Bearing Pressure</li> </ul>	7.03 kg/cm² TBD
Drive Speed	4.5 km/h
<ul> <li>Gradeability</li> </ul>	40%
Turning Radius (Inside)	
<ul> <li>Axles Retracted</li> </ul>	7.10 m
<ul> <li>Axles Extended</li> </ul>	2.30 m
Turning Radius (Outside)	
<ul> <li>Axles Retracted</li> </ul>	9.50 m
<ul> <li>Axles Extended</li> </ul>	6.60 m
$1. Certain\ options\ or\ country\ standards\ may\ increase\ weight\ and/or\ dimensions.$	



# **Reach Diagram**



# **Dimensions**

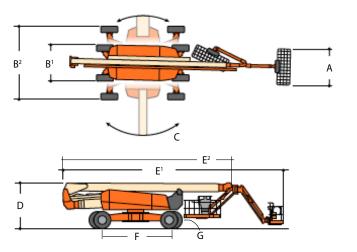

# **IMPORTANT**

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.



### **JLG EMEA BV**

Polaris Avenue 63 2132 JH Hoofddorp The Netherlands Tel: +31 (0)23 565 5665 Fax: +31 (0)23 557 3750

www.jlg.com

An Oshkosh Corporation Company