

3150 RJ



Crawler lift - Telescopic


Omme Lift A/S
Lægårdsvej 4
7260 Sdr. Omme, Denmark
Phone: (+45) 75 34 13 00
Email: omme@ommelift.dk - Web: www.ommelift.com

OMMELIFT



Quality since 1906

3150 RJ Crawler lift

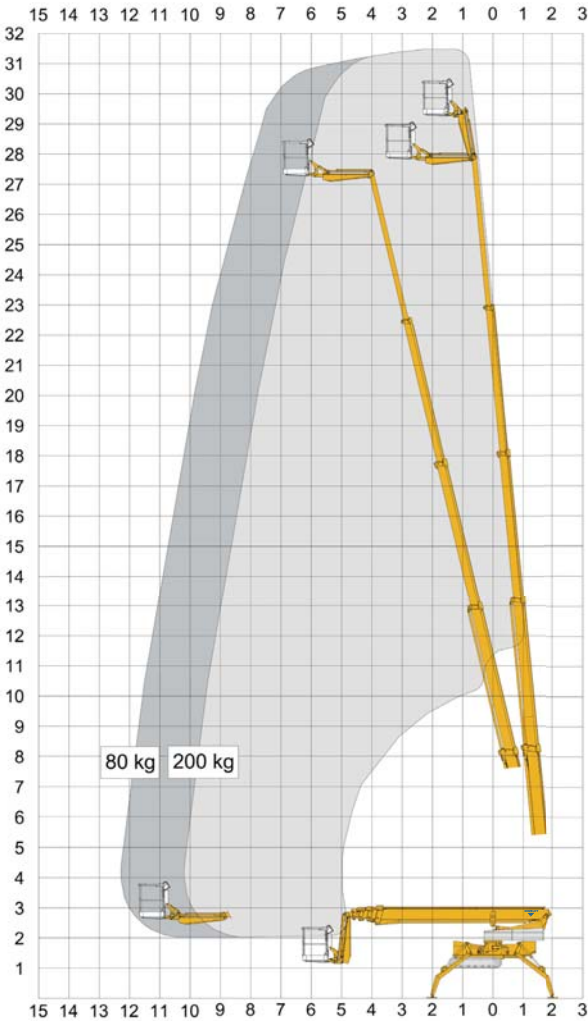

Technical Data:	3150 RBJ	3150 RDJ	3150 RBDJ
Max. working height		31.1 m	
Max. platform height		29.1 m	
Max. outreach		12.6 m	
Up and over clearance		-	
Angle boom length (boom + basket)		-	
Jib length (jib + basket)		2.7 m	
Vertical jib rotation		90°	
Turret rotation		± 355°	
Basket rotation		± 41°	
Max. basket load		200 kg	
Basket size (detachable)		1.25 x 0.8 x 1.1 m	
Stabilizer pad size		0.28 x 0.44 m	
	¹ Diesel	BATTERY	² DIESEL
Engine			³ HYBRID
Engine		14kW/18.8hp	14kW/18.8hp
Fuel tank capacity		23 l	23 l
Generator		24 V / 22 A	24 V / 22 A
Battery pack		24V/400Ah/5h	24V/200Ah/5h
Charger		24 V / 30 A	24 V / 30 A
Double charger system		Standard	Optional
Elec. descent from basket			Optional
See www.ommelift.com for more features and options			
Gradeability, max. across slope		25% (14.0°)	
Gradeability, max. up and down slope		35% (19.3°)	
Set-up ability on uneven ground		40% (21.8°)	
Crawler track length		1.76 m	
¹ Undercarriage in Wide ² Undercarriage in Narrow ³ Wide set-up ⁴ Wide/Narrow set-up			
Total weight		4000 kg	4000 kg
¹ Live load in transit position		386 kg/m ²	386 kg/m ²
² Live load in transit position		386 kg/m ²	386 kg/m ²
³ Live load in working position		199 kg/m ²	199 kg/m ²
⁴ Live load in working position		246 kg/m ²	246 kg/m ²
Ground pressure, tracks (Hard surface)		0.57 kg/cm ²	0.57 kg/cm ²
Ground pressure, outrigger pad		2.05 kg/cm ²	2.05 kg/cm ²
Max. force, outrigger		25.3 kN	25.3 kN

